HTJ 10 S10 SS



type of Application	internal
capacity	10 t
stroke	100 mm
length retracted	200 mm
length extracted	300 mm
weight	3,40 kg
oil content	208 cc
thread M	M60*2
thread length K	30 mm
D	60 mm
d	45 mm
E	17 mm
H	178 mm

for internal mast jack applications

The series of internal mast jack cylinders are laid out for permanent installation in the mast step. Fashioned entirely from stainless steel, both the cylinders and fittings meet all the necessary requirements for corrosion resistance.


The cylinders are screwed into the mast base from above before the base itself is attached to the mast.



HTJ cylinder



HTJ cylinder

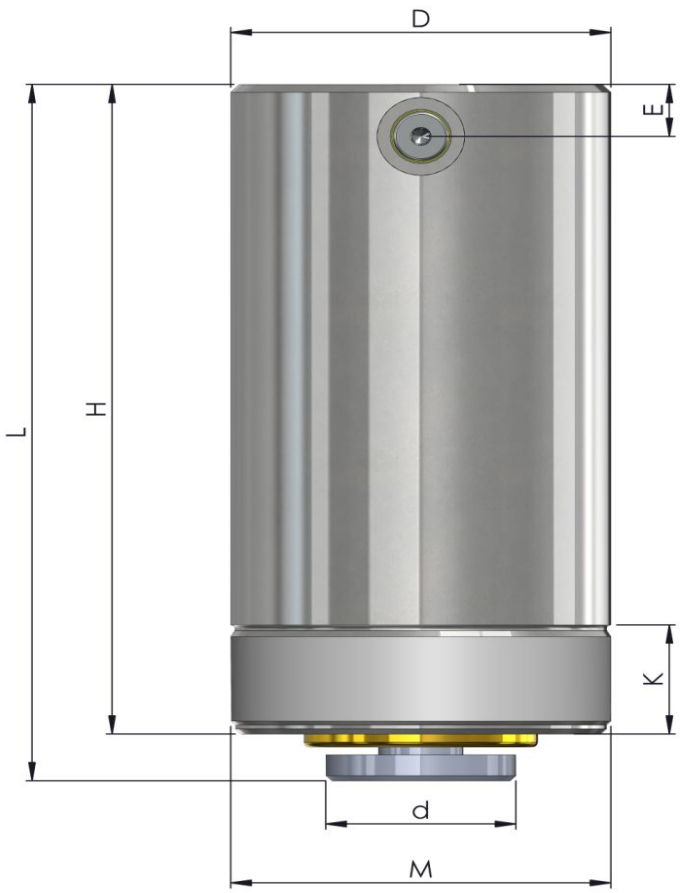



dimensions HTJ – see table for more information