HTJ 15 S15 SS



type of Application	internal
capacity	15 t
stroke	150 mm
length retracted	258 mm
length extracted	408 mm
weight	5,30 kg
oil content	318 cc
thread M	M70*1,5
thread length K	34 mm
D	70 mm
d	45 mm
E	15 mm
H	237 mm

for internal mast jack applications

The series of internal mast jack cylinders are laid out for permanent installation in the mast step. Fashioned entirely from stainless steel, both the cylinders and fittings meet all the necessary requirements for corrosion resistance.


The cylinders are screwed into the mast base from above before the base itself is attached to the mast.



HTJ cylinder



HTJ cylinder

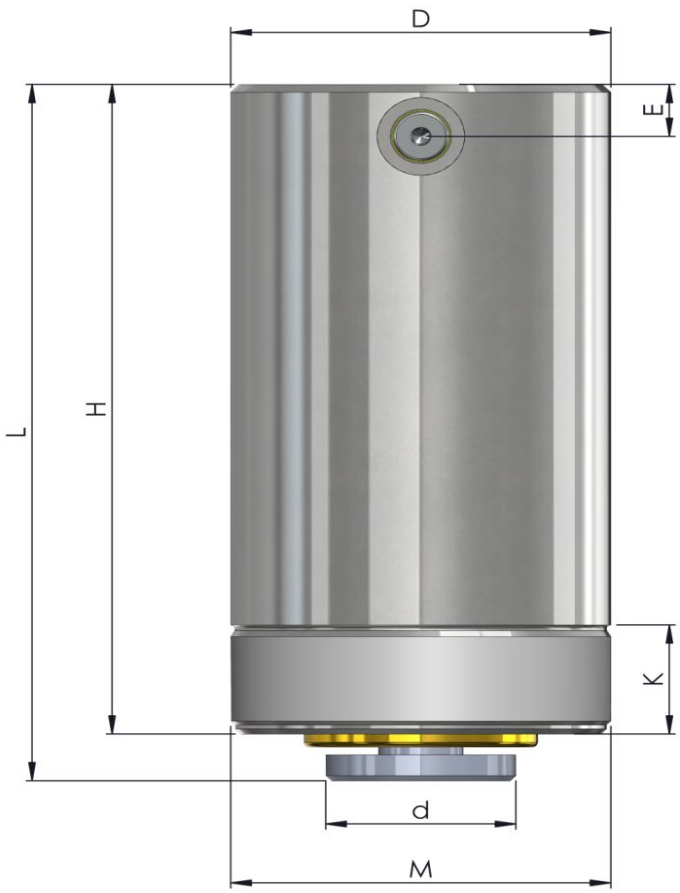



dimensions HTJ – see table for more information