HTJ 35 S15 SS



type of Application	internal
capacity	35 t
stroke	150 mm
length retracted	272 mm
length extracted	422 mm
weight	13,60 kg
oil content	942 cc
thread M	M105*2
thread length K	35 mm
D	107 mm
d	65 mm
E	12 mm
H	246,50 mm

for internal mast jack applications

The series of internal mast jack cylinders are laid out for permanent installation in the mast step. Fashioned entirely from stainless steel, both the cylinders and fittings meet all the necessary requirements for corrosion resistance.


The cylinders are screwed into the mast base from above before the base itself is attached to the mast.



HTJ cylinder



HTJ cylinder

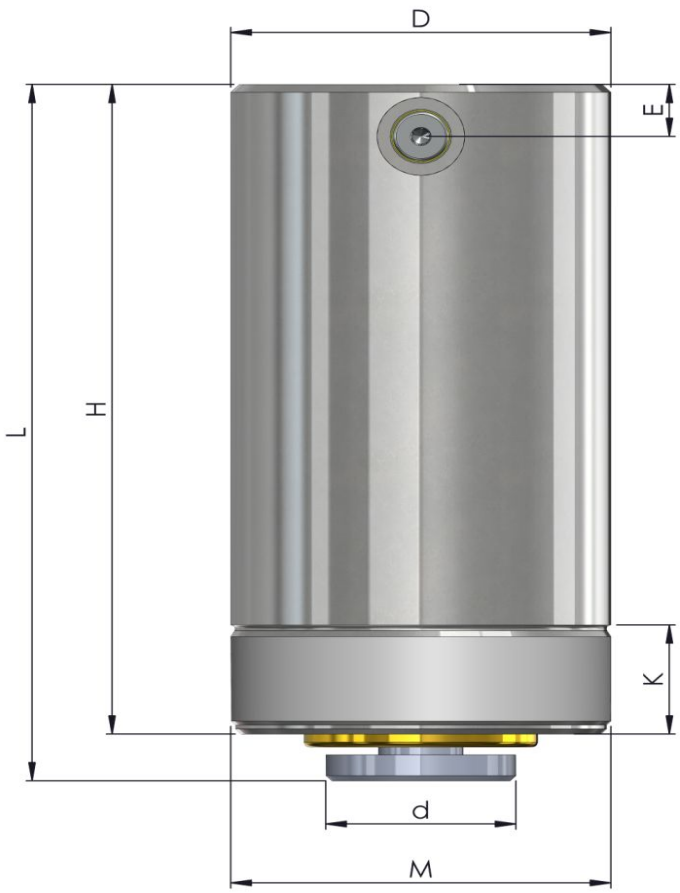



dimensions HTJ – see table for more information